

FILTLAB



AEROCEL

Aerocel provides high efficiency filtration. Aluminium separator add rigidly to the construcion and increase stabilization air flow. Galvanized steel frame with header (single / double / none)

SPECIFICATION


Nominal Size W x H x D (in)	Actual Size W x H x D (mm)	Average Efficiency (%)	Filter Class EN779	Rated Air Flow (CMH)	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)
24 x 24 x 12	592 x 592 x 292	90-95%	8	3400	140	450
12 x 24 x 12	287 x 592 x 292	90-95%	8	1700	140	450
24 x 24 x 6	592 x 592 x 149	90-95%	8	3400	140	450
12 x 24 x 6	287 x 592 x 149	90-95%	8	1700	140	450
24 x 24 x 12	592 x 592 x 292	80-85%	7	3400	125	450
12 x 24 x 12	287 x 592 x 292	80-85%	7	1700	125	450
24 x 24 x 6	592 x 592 x 149	80-85%	7	3400	125	450
12 x 24 x 6	287 x 592 x 149	80-85%	7	1700	125	450
24 x 24 x 12	592 x 592 x 292	60-65%	6	3400	100	450
12 x 24 x 12	287 x 592 x 292	60-65%	6	1700	100	450
24 x 24 x 6	592 x 592 x 149	60-65%	6	3400	100	450
12 x 24 x 6	287 x 592 x 149	60-65%	6	1700	100	450

Operating Condition

Temperature	70°C
Humidity Limit	100%RH

Material

Frame	Galvanized Steel
Filter Media	Glass Fiber
Separator	Aluminums
Sealant	Hot melt
Header	Single, Double or None
Gasket	Neoprene

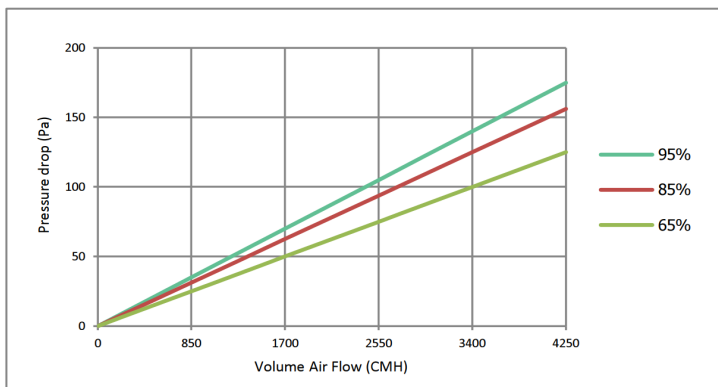

Pressure drop diagram valid for size 592 mm x 592 mm