

FILTLAB

K50 / K100




Primary climate control , Pre filter for HVAC , painting industry.

Excellent media performance in humidity condition.

- High efficiency with low pressure filter media.
- Sturdy card board frame.
- Environmentally friendly materials.
- Fire protection : UL 900

SPECIFICATION

Nominal Size W x H x D (in)	Actual Size W x H x D (mm)	Filter Class EN779	Pleats per Ft.	Rated Air Flow (CMH)	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)
24 x 24 x 2	592 x 592 x 44	G4	21	3400	63	250
20 x 24 x 2	490 x 592 x 44	G4	17	2800	63	250
12 x 24 x 2	287 x 592 x 44	G4	11	1700	63	250
24 x 24 x 2	592 x 592 x 44	G4	15	3400	63	250
20 x 24 x 2	490 x 592 x 44	G4	13	2800	63	250
12 x 24 x 2	287 x 592 x 44	G4	8	1700	63	250
24 x 24 x 4	592 x 592 x 95	G4	18	3400	50	250
20 x 24 x 4	490 x 592 x 95	G4	14	2800	50	250
12 x 24 x 4	287 x 592 x 95	G4	9	1700	50	250
24 x 24 x 4	592 x 592 x 95	G4	15	3400	50	250
20 x 24 x 4	490 x 592 x 95	G4	12	2800	50	250
12 x 24 x 4	287 x 592 x 95	G4	7	1700	50	250

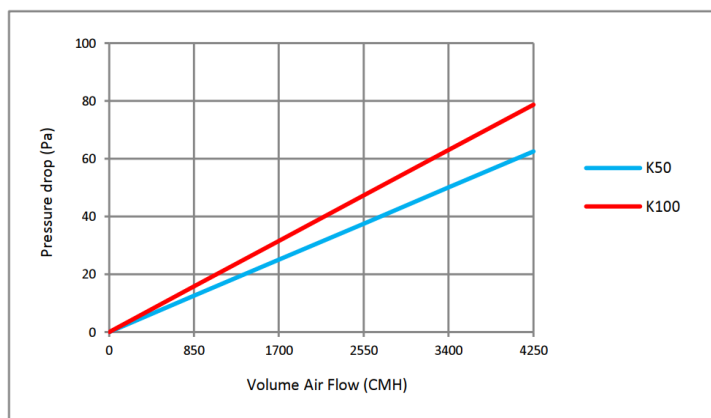

Operating Condition

Temperature	80°C
Humidity Limit	NONE

Material

Frame	Beverage Board
Filter Media	Special Synthetic Fiber

Pressure drop diagram valid for size 592 mm x 592 mm