

FILT LAB

MS-Flo Std



All HVAC and air handling installations with a filtration function.


Filtration of coarse , Fine and superfine dust. Synthetic meltblown wedge-shaped pockets with spacers.

Number of pockets & depth are optional.

Fire protection : Calss B as of DIN EN 13 501-1 2007

SPECTATION

Nominal Size W x H x D (in)	Actual Size W x H x D (mm)	No. of Pockets	Filter Class EN779	Rated Air Flow (CMH)	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)
24 x 24 x 21	592 x 592 x 534	8	9	3400	145	450
12 x 24 x 21	287 x 592 x 534	4	9	1700	145	450
24 x 24 x 21	592 x 592 x 534	8	8	3400	135	450
12 x 24 x 21	287 x 592 x 534	4	8	1700	135	450
24 x 24 x 21	592 x 592 x 534	8	7	3400	105	450
12 x 24 x 21	287 x 592 x 534	4	7	1700	105	450
24 x 24 x 21	592 x 592 x 534	8	6	3400	90	450
12 x 24 x 21	287 x 592 x 534	4	6	1700	90	450
24 x 24 x 21	592 x 592 x 534	8	5	3400	65	450
12 x 24 x 21	287 x 592 x 534	4	5	1700	65	450

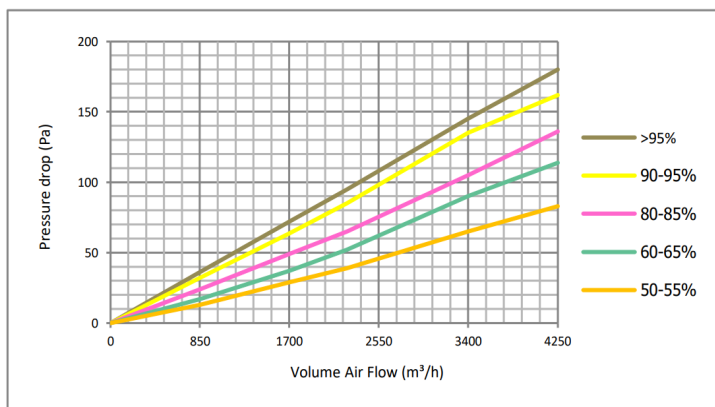

Pressure drop diagram valid for size 592 mm x 592 mm

Operating Condition

Temperature	80°C
Humidity Limit	100%RH

Material

Frame	Galvanized Steel
Filter Media	Synthetic Fiber Fleece