

# FILTLAB

## M-Flo




All HVAC and air handling installations with a filtration function.

Filtration of coarse , Fine and superfine dust.

- High dust holding capacity
- Low Pressure Drop
- Fire protection : DIN 53438 class F1.

## SPECTATION

Nominal Size W x H x D (in)	Actual Size W x H x D (mm)	No. of Pockets	Filter Class EN779	Rated Air Flow (CMH)	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)
20 x 24 x 21	490 x 592 x 534	4	G3	2800	25	250
12 x 24 x 21	287 x 592 x 534	3	G3	1700	25	250
24 x 24 x 15	592 x 592 x 360	4	G3	3400	23	250
20 x 24 x 15	490 x 592 x 360	4	G3	2800	23	250
12 x 24 x 15	287 x 592 x 360	3	G3	1700	23	250
24 x 24 x 12	592 x 592 x 534	4	G4	3400	30	250
24 x 24 x 12	490 x 592 x 534	4	G4	2800	30	250
24 x 24 x 12	287 x 592 x 534	3	G4	1700	30	250
24 x 24 x 15	592 x 592 x 360	4	G4	3400	28	250
20 x 24 x 15	490 x 592 x 360	4	G4	2800	28	250
12 x 24 x 15	287 x 592 x 360	3	G4	1700	28	250

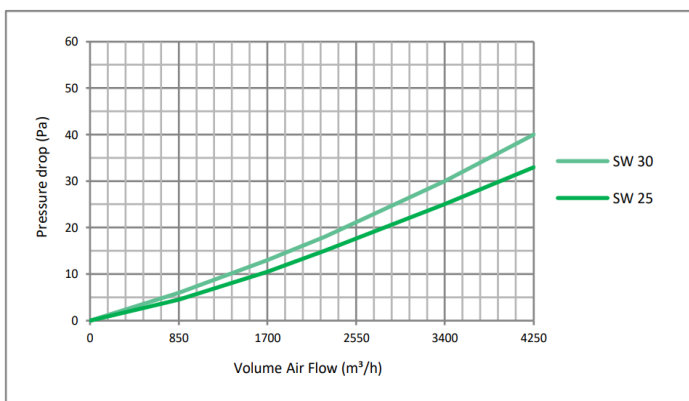

Pressure drop diagram valid for size 592 mm x 592 mm

## Operating Condition

Temperature	80°C
Humidity Limit	100%RH

## Material

Frame	Galvanized Steel
Filter Media	Synthetic Fiber Fleece